



High Pressure Centrifugal Booster Pump

MODEL

45HB, 70HB

APPLICATIONS

Wide variety of industrial, commercial and agricultural uses, especially:

- High rise buildings
- Multiple dwelling buildings
- Reverse osmosis systems
- High pressure cleaning
- Spraying systems
- Booster service

SPECIFICATIONS

Pump

- Capacities: to 100 GPM
- Heads: to 760 feet.
- Pipe connections:
Suction 2" NPT
Discharge 2" NPT.
- Temperature: 180°F, 82°C maximum.

- Inlet pressure: 100 PSI maximum.
- Rotation: right hand, i.e., clockwise when viewed from motor end.

Motor

- Open drip-proof or TEFC enclosure
60 Hz, 3500 RPM.
Threaded shaft extension.
- Single phase:
3 HP 115/208–230 V
5 HP 208–230 V
7½ HP 208–230 V.
- Three phase:
3–10 HP 208–230/460 V.

FEATURES

■ **Multi-Stage Design:** This configuration provides a steady, quiet and vibration-free operation for years of trouble-free service.

■ **Impellers and Diffusers:** Glass filled thermoplastic. Precision molded for high efficiencies.


■ **Bowls:** Constructed with 300 series stainless steel. Rabbet lock for positive alignment – no gaskets required.

■ **Mechanical Seal:** Carbon/ceramic faces. BUNA elastomers 300 series stainless steel metal parts.

■ **Motor:** Close-coupled design. Ball bearings carry all radial/axial thrust loads. Designed for continuous operation. All ratings are within working limits of the motor.

Goulds Pumps is ISO 9001 Registered.

WARNING: This is a booster pump. It has no lift capability.
DO NOT RUN DRY.
DO NOT DEADHEAD.

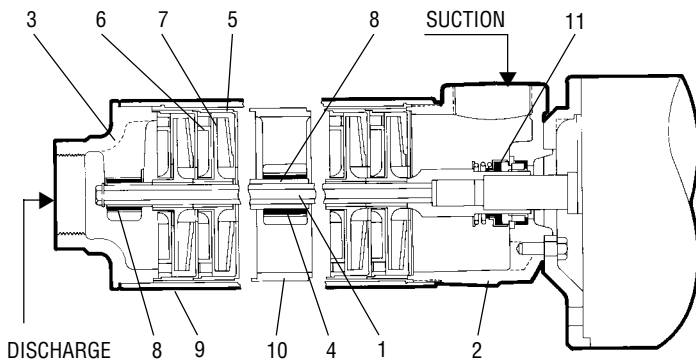


High Pressure Centrifugal Booster Pump

MODEL

45HB, 70HB

COMPONENTS

Item No.	Description	Material
1	Hex shaft and coupling	300 series stainless steel
2	Suction housing	Brass (ASTM B584)
3	Discharge head	Brass (ASTM B584)
4	Shaft sleeve	300 series stainless steel
5	Bowl	300 series stainless steel
6	Diffuser	Glass-filled thermoplastic
7	Impeller	Glass-filled thermoplastic
8	Marine bearing	BUNA
9	Casing	300 series stainless steel
10	Intermediate bearing spider	Brass (ASTM B584)
11	Mechanical seal	Carbon/ceramic faces, BUNA elastomers, 300 series stainless steel metal parts.

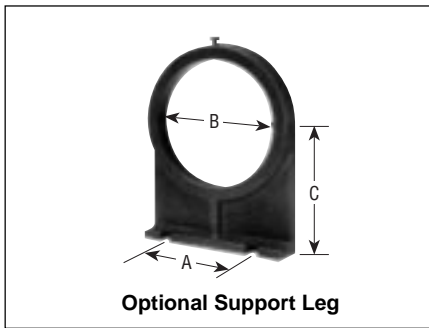

OPTIONAL SUPPORT LEG – dimensions (in inches)

Model	Frame	A	B	C
AM200	182/184	4 $\frac{1}{8}$	5 $\frac{3}{8}$	4 $\frac{1}{2}$
AM201	213/215	4 $\frac{1}{8}$	5 $\frac{3}{8}$	5 $\frac{1}{4}$

NOTE: Support leg is not required for 145 frame motors.


MODELS

Order No.	HP	No. of Stages	Phase	Enclosure	Frame	W.E.L.	Wt. (lbs.)
45HB13012	3	3	1	ODP	182	11 $\frac{1}{2}$	88
45HB23012	3	2	1	TEFC	184	10 $\frac{5}{8}$	101
45HB13035	3	3	3	ODP	145	11 $\frac{1}{2}$	59
45HB23035	3	2	3	TEFC	182	10 $\frac{5}{8}$	83
45HB15013	5	5	1	ODP	184	13 $\frac{3}{8}$	100
45HB25013	5	4	1	TEFC	213	12 $\frac{3}{4}$	147
45HB15035	5	5	3	ODP	182	13 $\frac{3}{8}$	80
45HB25035	5	4	3	TEFC	184	12 $\frac{3}{4}$	99
45HB17513	7 $\frac{1}{2}$	7	1	ODP	213	16 $\frac{1}{4}$	169
45HB17535	7 $\frac{1}{2}$	7	3	ODP	184	16 $\frac{1}{4}$	103
45HB27535	7 $\frac{1}{2}$	6	3	TEFC	213	15 $\frac{5}{8}$	150
45HB11135	10	10	3	ODP	213	21 $\frac{1}{2}$	155
45HB21135	10	8	3	TEFC	215	17 $\frac{1}{2}$	190
70HB13012	3	2	1	ODP	182	10 $\frac{5}{8}$	86
70HB23012	3	2	1	TEFC	184	10 $\frac{5}{8}$	99
70HB13035	3	2	3	ODP	145	10 $\frac{5}{8}$	57
70HB23035	3	2	3	TEFC	182	10 $\frac{5}{8}$	81
70HB15013	5	4	1	ODP	184	12 $\frac{3}{4}$	98
70HB25013	5	3	1	TEFC	213	11 $\frac{1}{2}$	145
70HB15035	5	4	3	ODP	182	12 $\frac{3}{4}$	78
70HB25035	5	3	3	TEFC	184	11 $\frac{1}{2}$	97
70HB17513	7 $\frac{1}{2}$	6	1	ODP	213	15 $\frac{5}{8}$	170
70HB17535	7 $\frac{1}{2}$	6	3	ODP	184	15 $\frac{5}{8}$	101
70HB27535	7 $\frac{1}{2}$	5	3	TEFC	213	13 $\frac{3}{8}$	148
70HB11135	10	9	3	ODP	213	20 $\frac{1}{4}$	153
70HB21135	10	7	3	TEFC	215	17 $\frac{1}{2}$	188

DIMENSIONS – determined by motor (in inches)

Frame	A	AB	B	BG	C	D	E	F	G	H	O
145	6 $\frac{1}{2}$	5 $\frac{1}{4}$	5 $\frac{15}{16}$	4 $\frac{7}{8}$	6	3 $\frac{1}{2}$	2 $\frac{3}{4}$	2	5 $\frac{5}{32}$	11 $\frac{11}{32}$	6 $\frac{5}{8}$
182/184	8 $\frac{1}{2}$	6	6 $\frac{1}{2}$	5 $\frac{3}{4}$	9 $\frac{9}{16}$	4 $\frac{1}{2}$	3 $\frac{3}{4}$	2 $\frac{1}{4}$	5 $\frac{5}{32}$	13 $\frac{13}{32}$	8 $\frac{1}{2}$
213/215	9 $\frac{1}{2}$	7 $\frac{3}{8}$	8	7 $\frac{1}{4}$	9 $\frac{1}{16}$	5 $\frac{1}{4}$	4 $\frac{1}{4}$	2 $\frac{3}{4}$	7 $\frac{5}{32}$	13 $\frac{13}{32}$	10 $\frac{3}{16}$

(All dimensions are in inches. Do not use for construction purposes.)

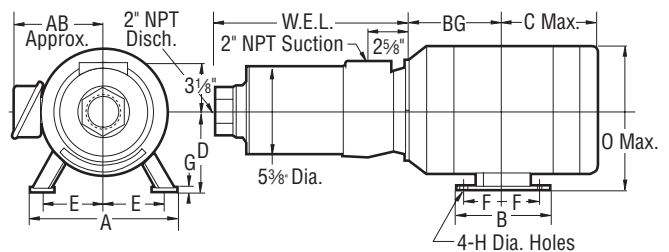

Goolds Pumps

